

## Light-Duty Spring Vibration Isolation Hangers



### Application

- \* Fan coil boxes
- \* Light-duty fans
- \* Piping
- \* Duct work

With lighter weight construction materials used in office buildings, schools and hospitals today, it does not take much energy to generate annoying vibration problems. The SHAA & SHAB rubber and spring vibration isolation hangers are designed to provide high efficiency isolation from structure-borne vibration for lighter point load applications. It is important the spring is adequately loaded to achieve the desired natural frequency. The SHAA provides 1" (25 mm) deflection at loads of 25, 45 and 55 pounds (11, 20 and 25 kg) and the SHAB provides deflection of 0.5" (13 mm) under loads of 15, 30 and 70 pounds (7, 14 and 32 kg). The SHAA & SHAB vibration isolation hangers are complete with molded neoprene rubber bottom caps which hold the spring in place, provide protection against short-circuiting due to rod misalignment and isolate against high frequency vibration from fan blade passage noise. These vibration isolation hangers are shipped completely assembled and are designed to be used with threaded rod through 3/8" (10 mm) in diameter.

### Description

Model SHAA & SHAB spring hangers consist of free standing, laterally stable steel springs in series with a molded elastomeric element assembled into a stamped and welded hanger bracket. The brackets are zinc plated and incorporate color-coded spring elements. To assure stability, the spring element has a minimum lateral spring stiffness of 1.0 times the rated vertical stiffness. The hanger brackets will carry a 500% overload without failure. The spring hangers are available in deflections from 0.5" to 1" (13 mm to 25 mm) and in capacities from 15 to 70 pounds (7 to 32 kg).

### Specifications

Vibration isolators for suspended equipment with minimum static deflection requirement exceeding 0.3" (7.5 mm), and where both high and low frequency vibrations are to be isolated, shall be hangers consisting of a laterally stable spring in series with an elastomer spring bottom cap and assembled in a stamped and welded steel bracket.

The stamped and welded bracket shall be finished with an electro-zinc plating. The elastomer insert shall be molded from oil-resistant compounds and shall be selected to operate within its published load range.

The spring element shall have a minimum lateral stiffness of 1.0 times the rated vertical stiffness.


Springs shall be color coded or otherwise identified to indicate load capacity.

The hanger bracket shall be designed to carry a 500% overload without failure and to allow a support rod misalignment through a 30° arc without metal-to-metal contact or other short circuit.

Isolation hangers shall be selected by the manufacturer for each specific application to comply with deflection requirements as shown on the Vibration Isolation Schedule or as indicated on the project documents.

The combination isolation hanger assembly with neoprene insert shall be Model SHAA or SHAB, as manufactured by Kinetics Noise Control, Inc.

Hanger Type	Spring Color	Rated Load lbs. (kg)	Rated Deflection inches (mm)	Dimensions in inches (mm)					
				A	B	C	D	E	F
SHAA-1-25	Black	25 (11)	1.04 (26)	2.15 (55)	4.00 (102)	1.50 (38)	.69 (17)	2.50 (64)	1.23 (31)
SHAA-1-45	Brown	45 (20)	1.00 (25)	2.15 (55)	4.00 (102)	1.50 (38)	.69 (17)	2.50 (64)	1.23 (31)
SHAA-1-55	Orange	55 (25)	1.00 (25)	2.15 (55)	4.00 (102)	1.50 (38)	.69 (17)	2.50 (64)	1.23 (31)
SHAB-15	Blue	15 (7)	.50 (13)	2.15 (55)	2.72 (69)	1.50 (38)	.69 (17)	1.50 (38)	1.23 (31)
SHAB-30	Gray	30 (14)	.50 (13)	2.15 (55)	2.72 (69)	1.50 (38)	.69 (17)	1.50 (38)	1.23 (31)
SHAB-70	Green	70 (32)	.50 (13)	2.15 (55)	2.72 (69)	1.50 (38)	.69 (17)	1.50 (38)	1.23 (31)

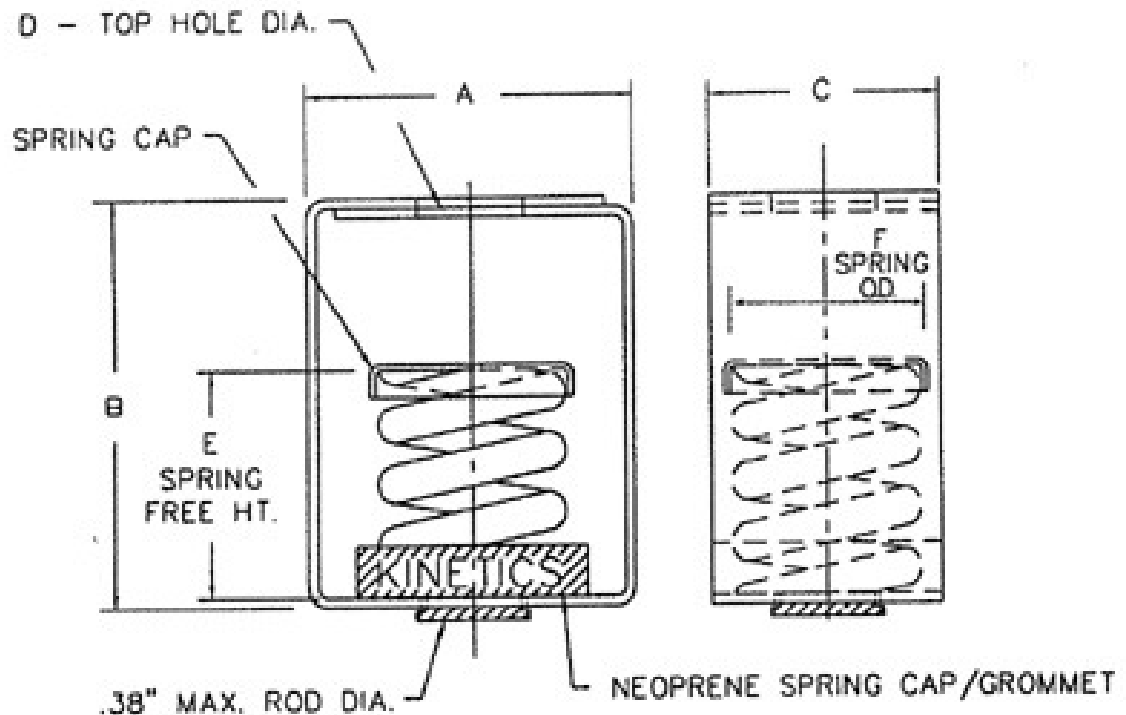

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.